C.B.S. 1,2 & 3 AND MAGNETO SYSTEMS SHARED SERVICE (MANUAL) USING TELE. No.196 OR 1/196 AND BELL SET No. 21 OR 31

NOTES:-

1. Transfer blue cord Conductor from T8 to T4.
2. In C.B.S.1 & Magneto Areas use N1296 (C.B.S.1 Connexions) for X Station. Y Station not to be more than 2 miles further from Exchange than X Station.
3. In C.B.S.2 & 3 Areas use this Dgm. with lines reversed for Y Station.
4. Where Magneto Exch. is modified to Dgm. CBS1124, at the X Station (Dgm.1296) strap Terminals T8 & T9 of Telephone No.196.
5. When an existing D.E.L. is converted to shared service existing Tele.156LB to be replaced by Tele.1/196LB.
6. When an extension bell is required where bell set No.31 is remote from telephone connect bell in place of soldered strap BI-E. Where bell set is combined with telephone connect bell in place of strap BT3-BT7.
7. For use on existing installations only. For combined sets on new installations fit Tele.396LB (Dgm.N3702).
8. Fit BT No.20/4 and cable 4W between telephone and bell set when required. See Dgm.N4199.
9. For New Work Capacitor MC No.$102^{1}/1$ has been superseded by Capacitor Paper No.7712. This is fitted in the bell set as follows:-
   (i) Bell set No.31 - fit in space between the induction coil and the bell coils and retain in position by a strip of tape plastic adhesive passing round the Capacitor and the induction coil.
   (ii) Bell set No.21 - fix inside the case using a clip No.$56^{3}/4$ in. and a No.6 Rd.Hd. wood screw.

P.O.E.D.
S BCH.

PAPER: W

CIRCULATION
C.B.S.1,2,3 & MAGNETO

ISSUES

C	NEW FORMAT.	11-8-67
B	REDRAWN. NOTES REVISED. MADE 3 PANELS.	26-3-56
	D.W. E.S.R.	19-11-46

EXPLANATORY { X STATION C.B.S. 2 & 3 SYSTEMS / Y STATION C.B.S. 1 & MAGNETO SYSTEMS } NOTES 2 & 3

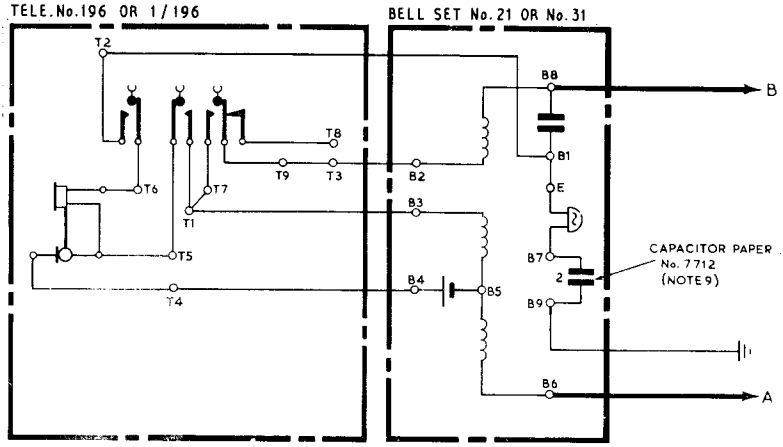

CONNEXIONS WHEN BELL SET FITTED APART FROM TELEPHONE

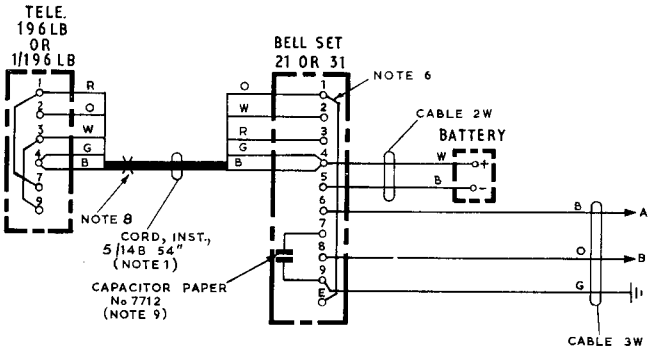

CONNEXIONS FOR COMBINED SET (NOTE 7)